

TRACE PRESET
FOR
VK-S274R SERIES

[REV. 1.1]

This manual applies following models:

<NTSC> VK-S274R
<PAL> VK-S274ER
<EIA> VK-K274R
<CCIR> VK-K274ER

CONTENTS

● SPECIFICATION	4
1. Communication protocol	4
2. Connect condition	4
3. Communication data format	5
a) Normal command	5
b) Special command	5
4. Command timing	6
a) Write command timing	6
b) Read command timing	6
i) 4800bps	6
ii) The other baudrate (9600bps, 19200bps, 38400bps, 57600bps)	6
c) Timing table program AE command	7
d) Timing table after ZOOM commands (DSS mode only)	7
● DIFFERENCE (VK-S274 SERIES AND VK-S274R SERIES)	8
1. difference of data / function	8
● <TYPE-1> NO-TRACE PRESET FLOW CHART	9
1. MEMORY MODE	10
2. PRESET MODE	11
● <TYPE-2> TRACE PRESET FLOW CHART	12
1. MEMORY MODE	13
2. PRESET MODE	15

• **APPENDIX19**

[Note]  is difference between VK-S274 series and VK-S274R series.

PART ONE

• SPECIFICATION

1. Communication protocol

Communication between the microcomputer of the camera and the PC is available by using the RS-232C protocol. The microcomputer receives each control command given by the PC and echoes it back to the PC.

2. Connect condition

Data length	8 bit
Stop bit	1 bit
Parity	even / non
Baudrate	4800 / 9600 / 19200 / 38400 / 57600 bps

3. Communication data format

All communication data consist of eight or ten ASCII characters (8 bytes or 10 bytes).

The format of the communication data is shown in Fig.1.


a) Normal command

Communication data start with the character ":"(colon).

b) Special command

Communication data start with the character "/"(slash).

(a) 8 bytes format [Normal command]



CM

Command as follows

R :Read 1 byte data of micro-Com. RAM or EEPROM

W :Write 1 byte data of micro-Com. RAM or EEPROM


A3-A0

Address data of micro-Com. RAM or EEPROM (write in hex. 0000-FFFF)

D1-D0

Data of micro-Com. RAM or EEPROM (write in hex. 00-FF)

(b) 10 bytes format [Normal command]



CM

Command as follows

r :Read 2 bytes data of micro-Com. RAM or EEPROM

w :Write 2 bytes data of micro-Com. RAM or EEPROM


A3-A0

Address data of micro-Com. RAM or EEPROM (write in hex. 0000-FFFF)

D3-D0

Data of micro-Com. RAM or EEPROM (write in hex. 0000-FFFF)

(c) 8 bytes format [Special command]



CM

Command as follows

M : <Privacy mask> DEGREE WRITE command

D5-D0

Data of micro-Com. RAM or EEPROM (write in hex. 000000-FFFFFF)


Fig. 1 Communication data format

4. Command timing

a) Write command timing

Writing commands space requirement is 1 field.

< Write timing >

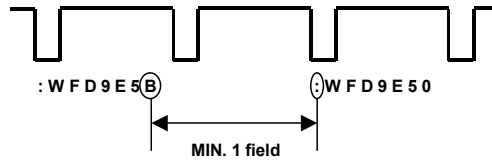


b) Read command timing

i) 4800bps

Reading commands space requirement is 1 field.


< Read timing >

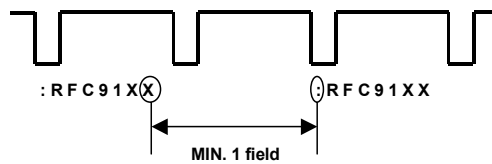

ii) The other baudrate (9600bps, 19200bps, 38400bps, 57600bps)

Reading commands space requirement is 4ms.

< Read timing >

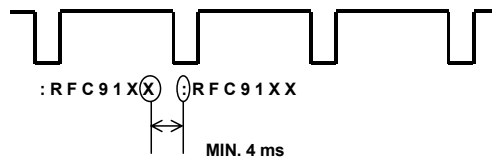

- c) Timing table program AE command
[Please attached Fig. 2]

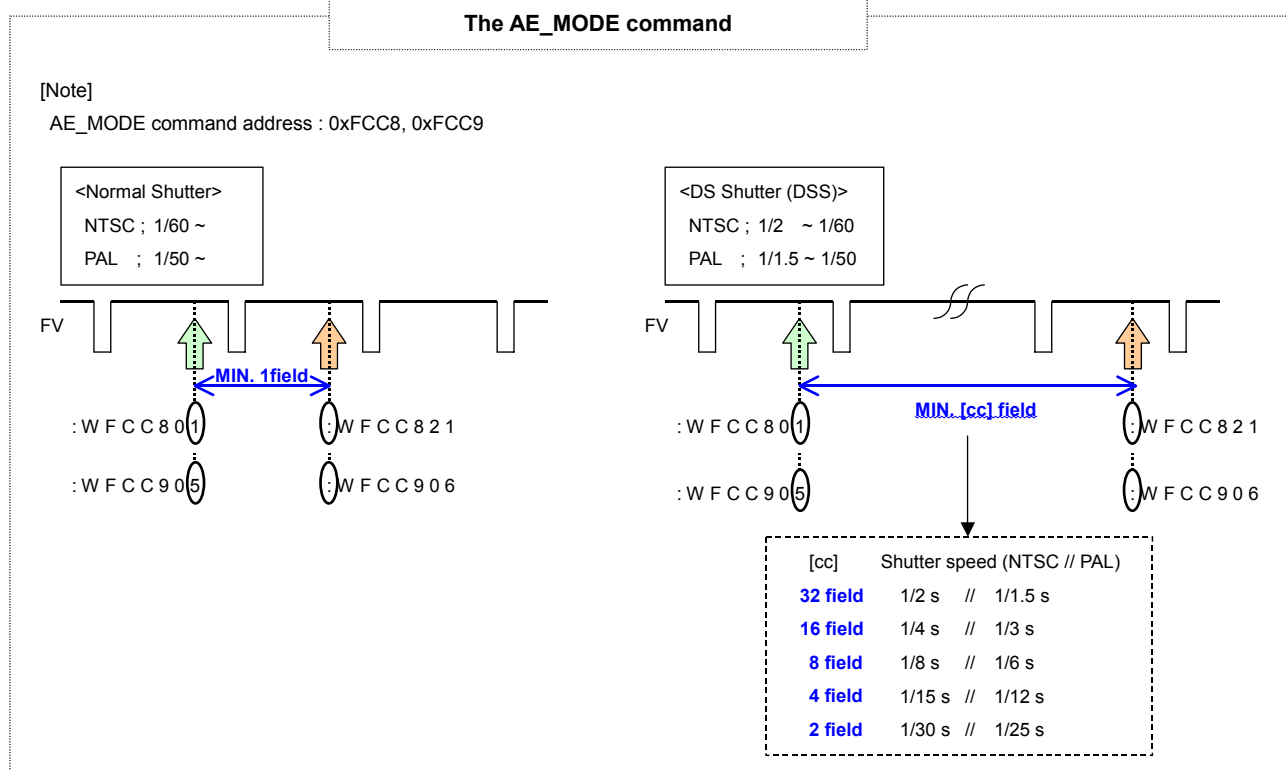


Fig. 2 Changed to AE_MODE timing

- d) Timing table after ZOOM commands (DSS mode only)
[Please attached Fig. 3]

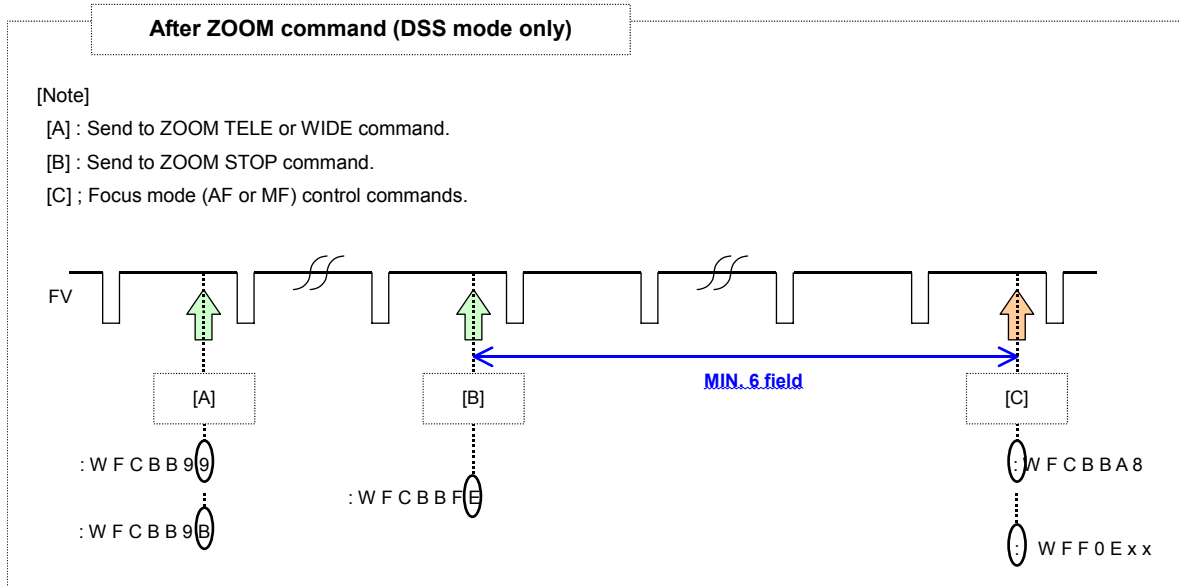


Fig. 3 After ZOOM commands timing

PART
TWO

- Difference (VK-S274 series and VK-S274R series)

It is difference of address/ data/ function
between VK-S274 series and VK-S274R series.

1. difference of data / function
For details, please confirm on each page.


Item	Page	Function	Note
[PART – THREE] NO-TRACE PRESET FLOW CHART			
PART THREE	9	Type-1 Preset	Type-1 preset speed up ; 1.6s →1.3s

PART
THREE


- **<TYPE-1>** NO-TRACE PRESET FLOW CHART

[ZOOM SPEED : 1.3 s]

1. MEMORY MODE

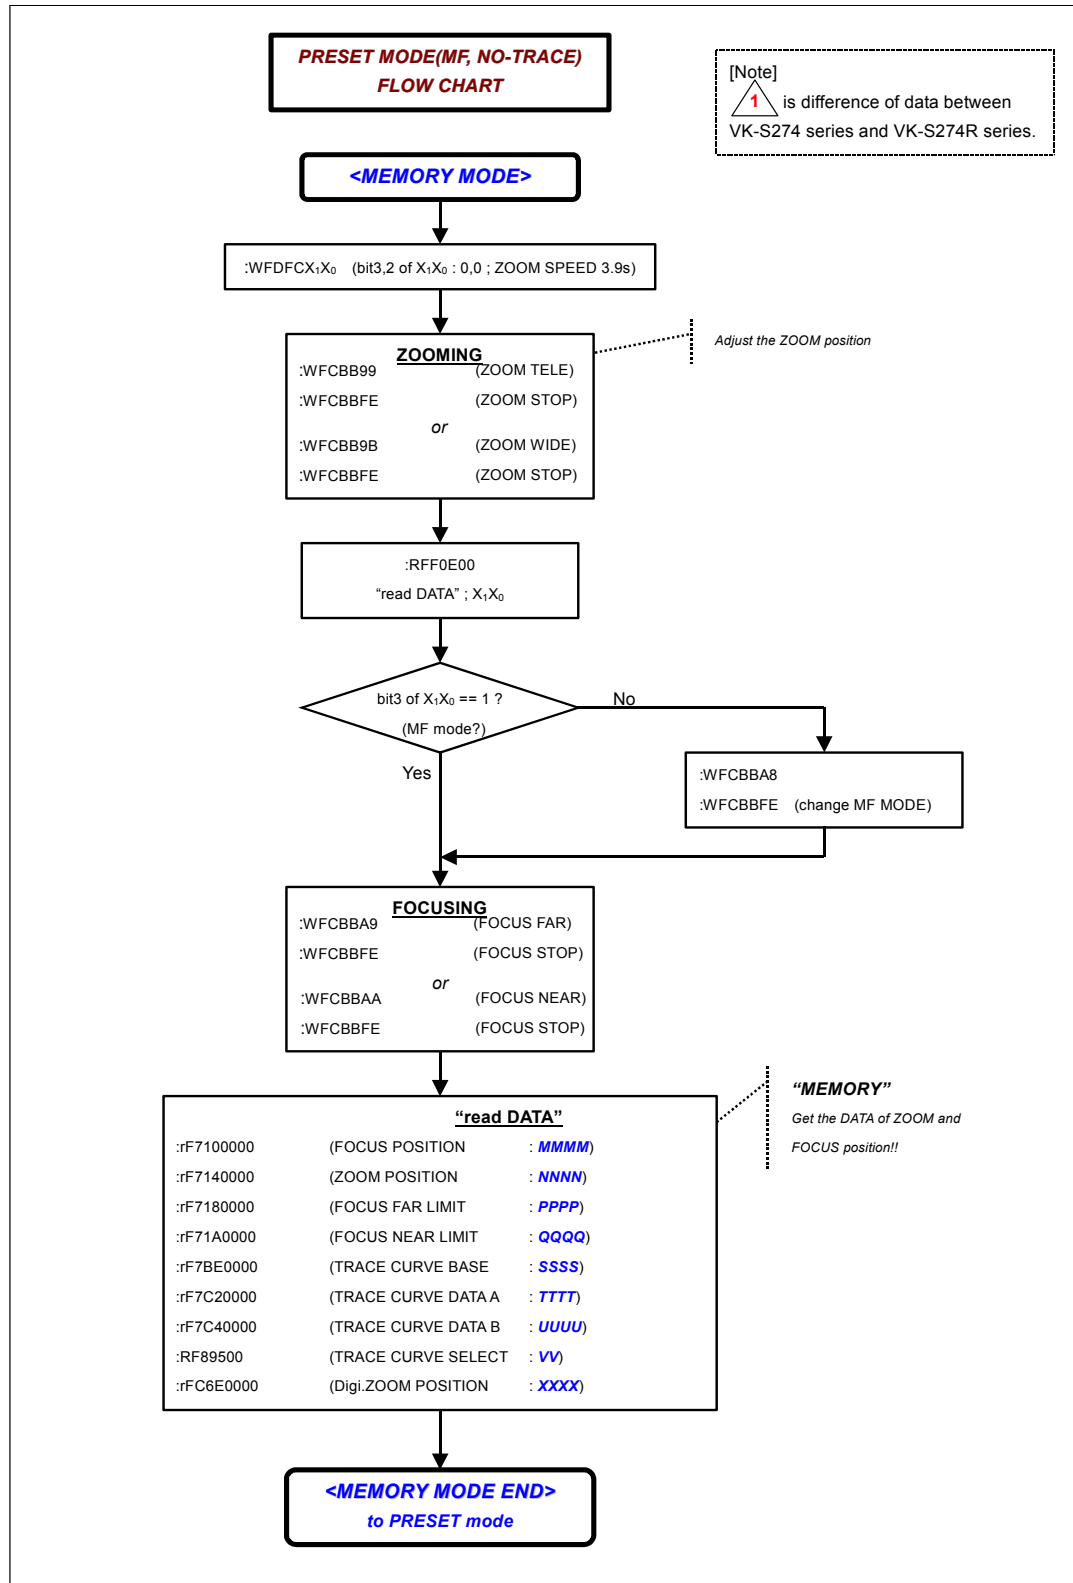

2. PRESET MODE

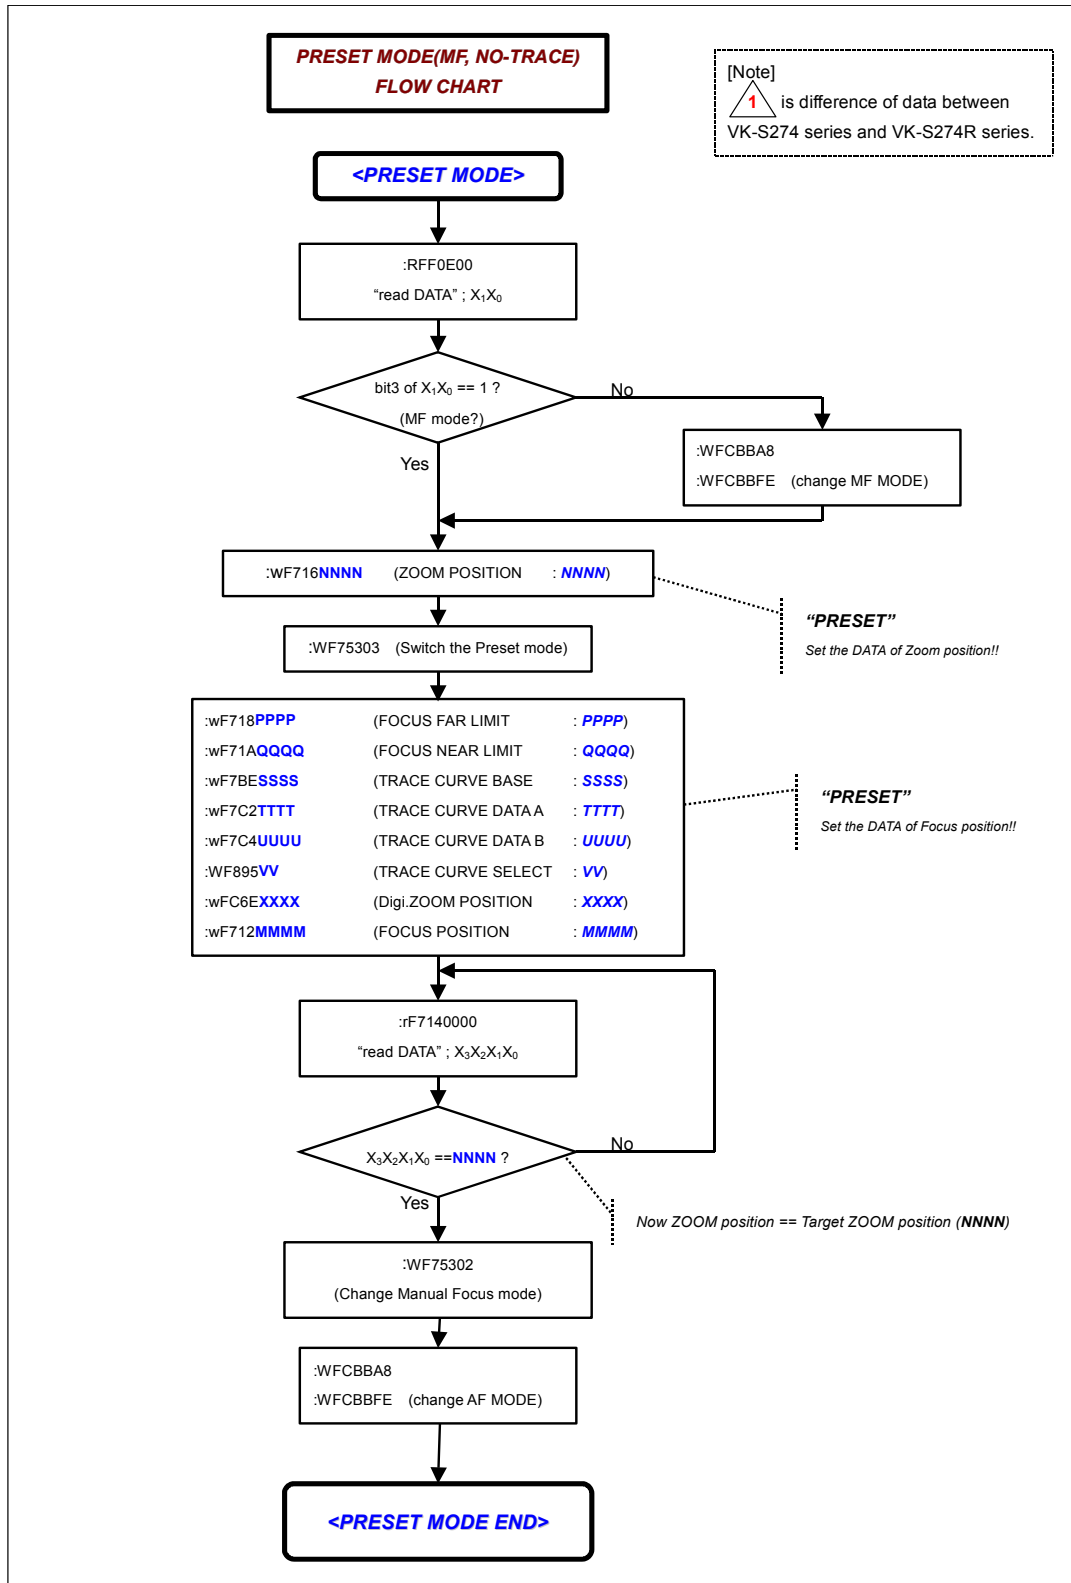



PART
FOUR

- <TYPE-2> TRACE PRESET FLOW CHART


[ZOOM SPEED : 2.4 s]


1. MEMORY MODE

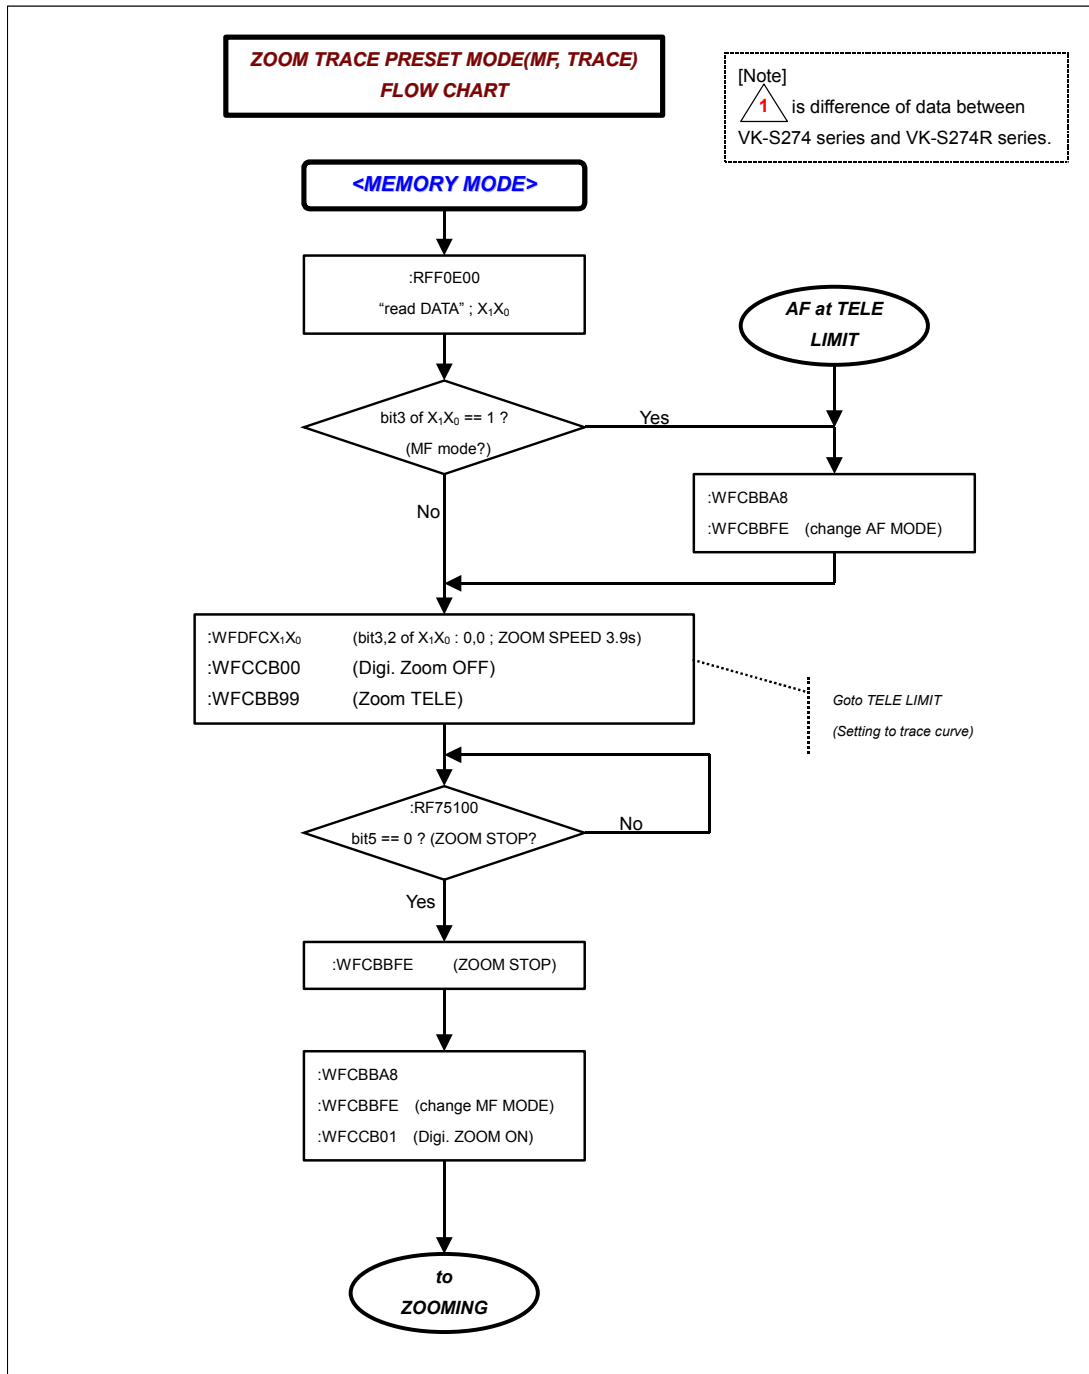


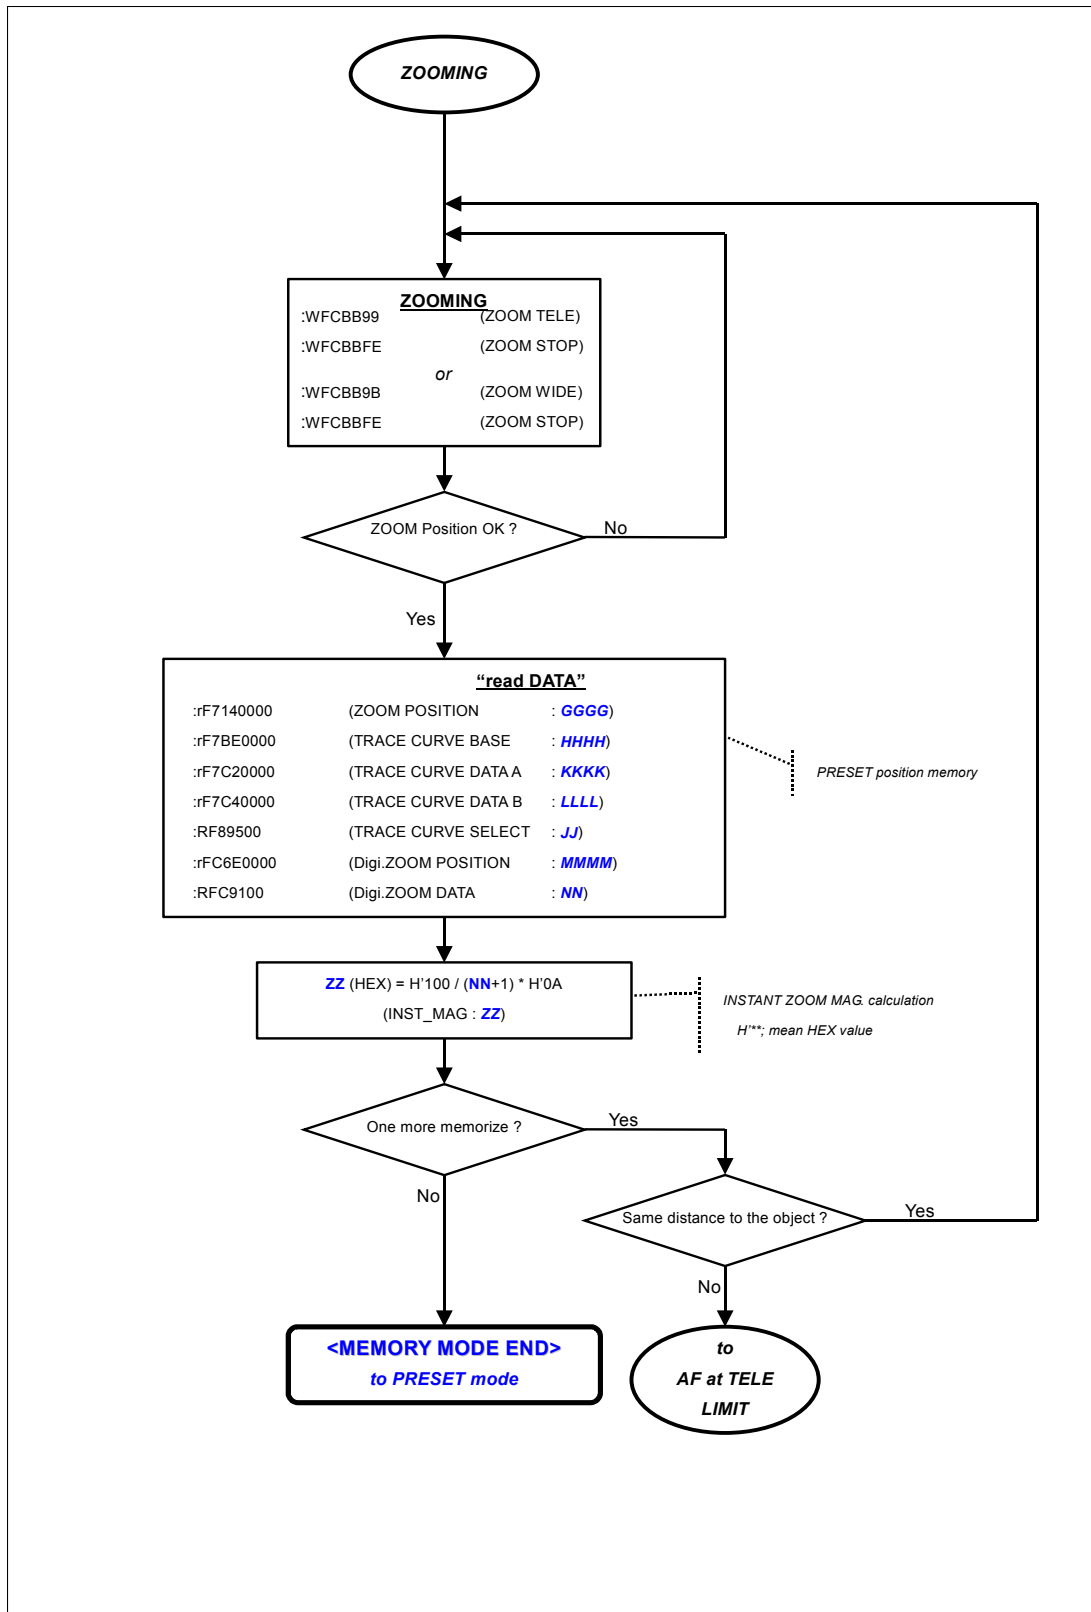


2. PRESET MODE

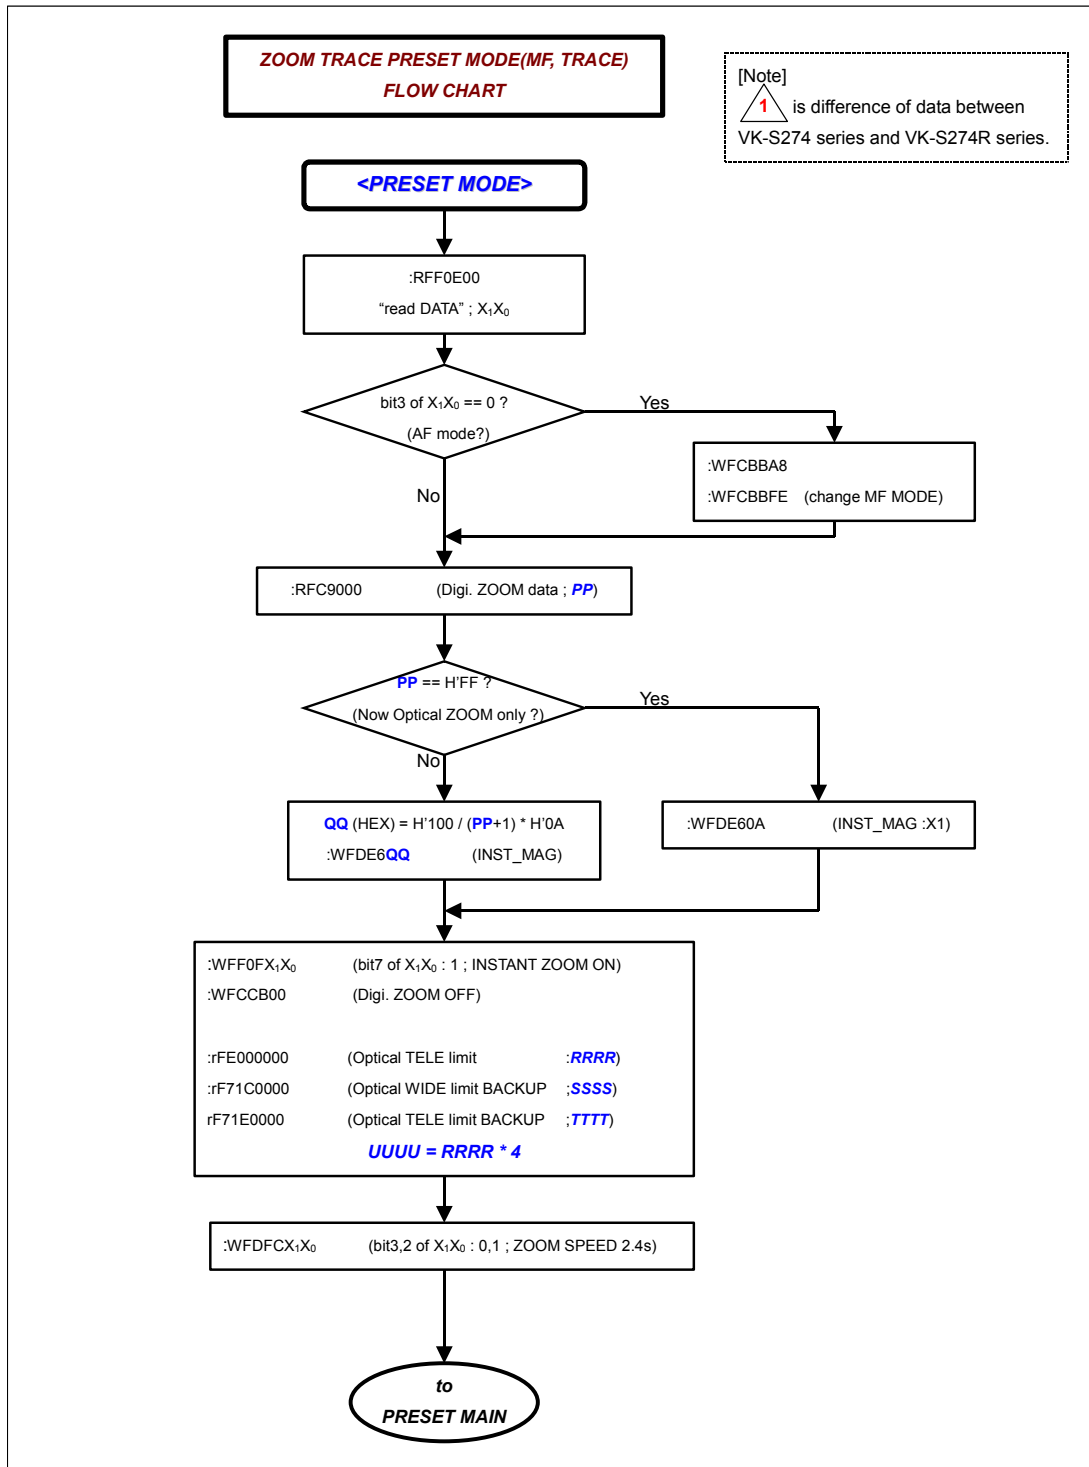

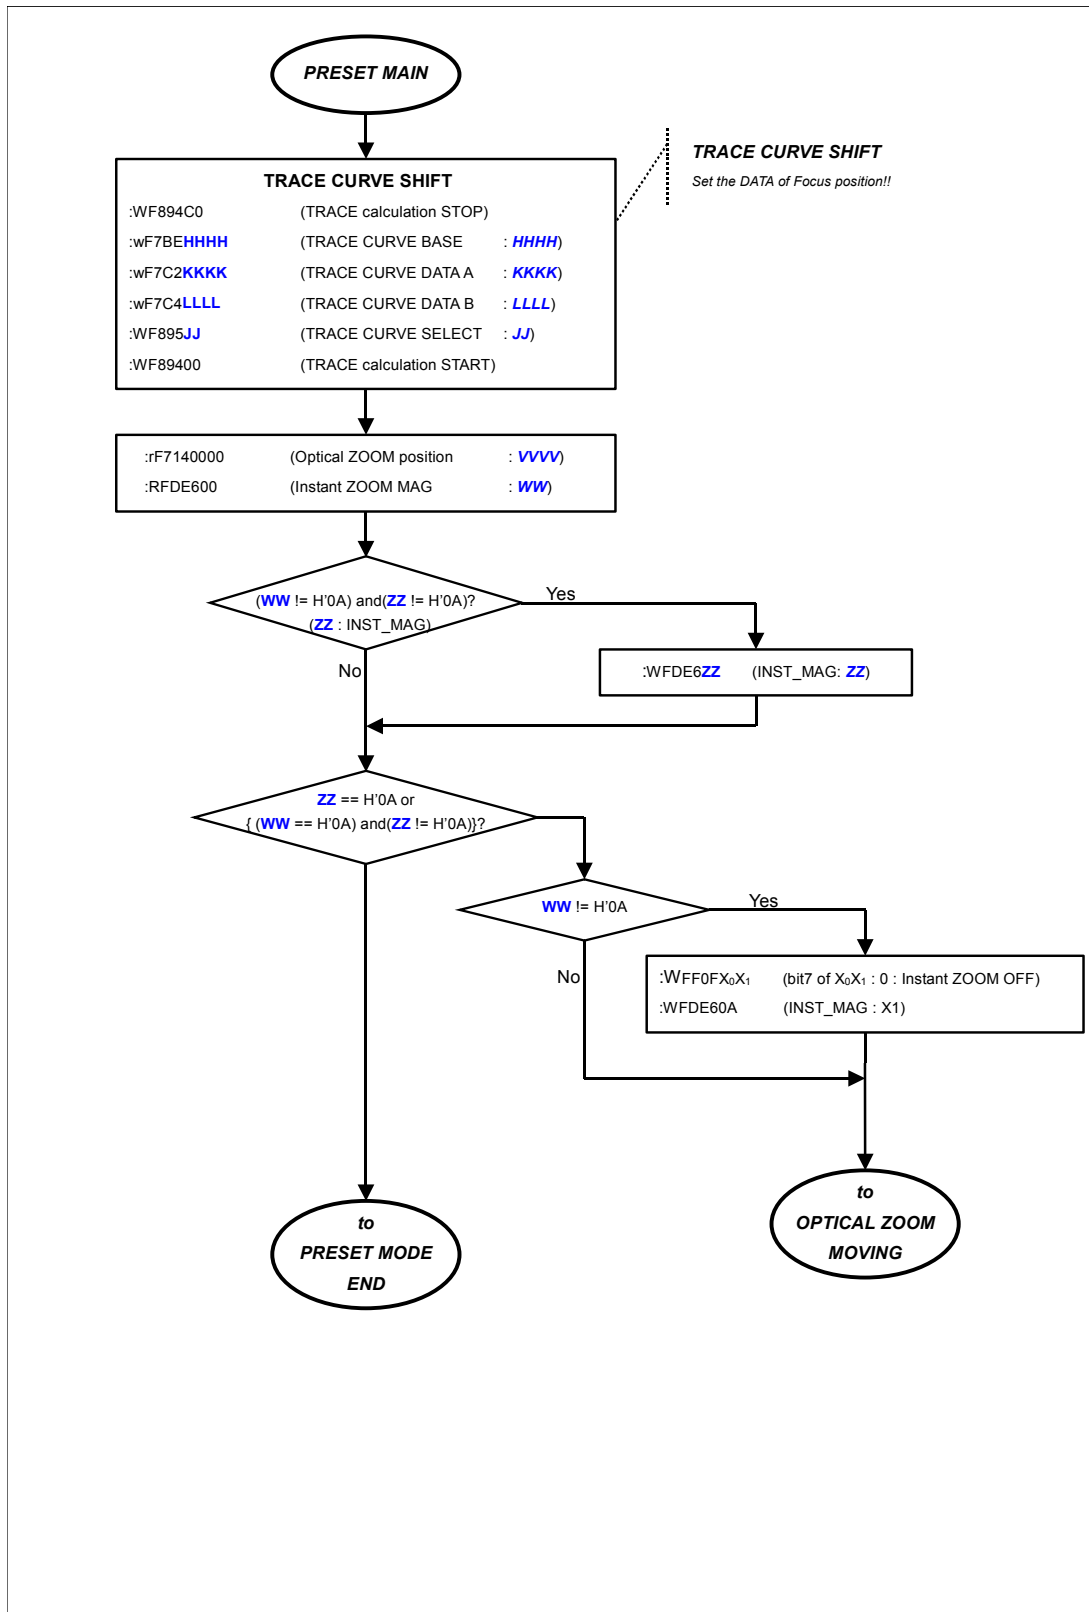

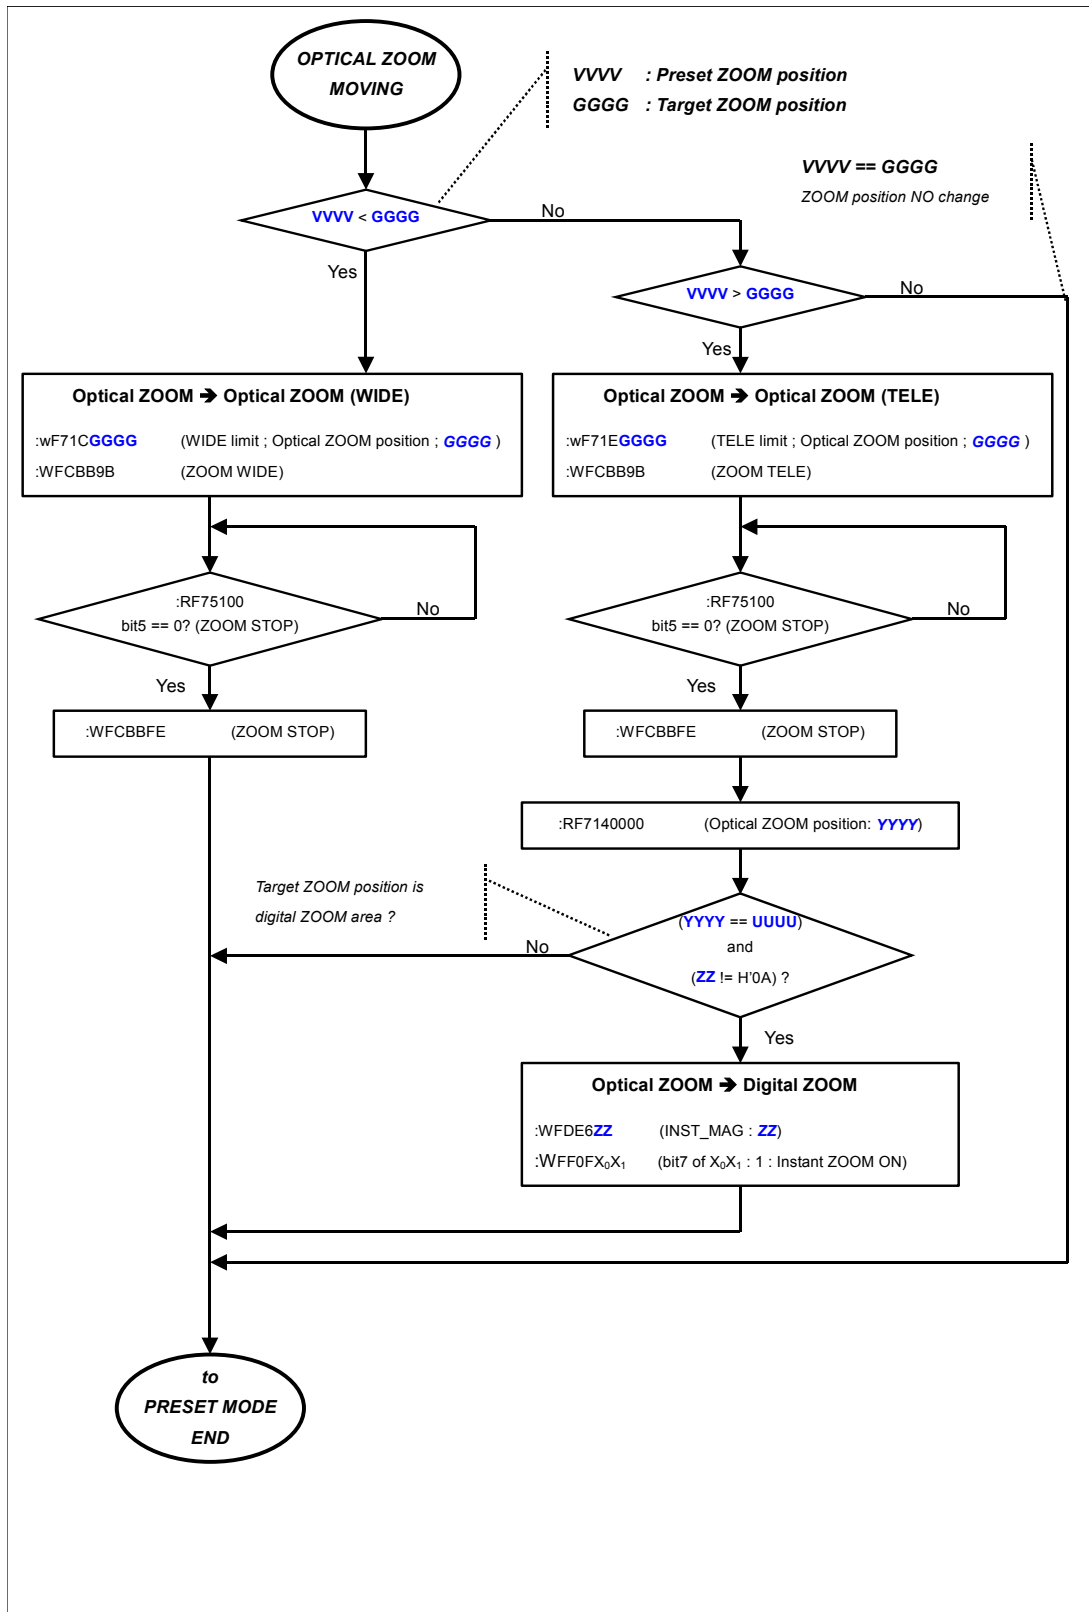

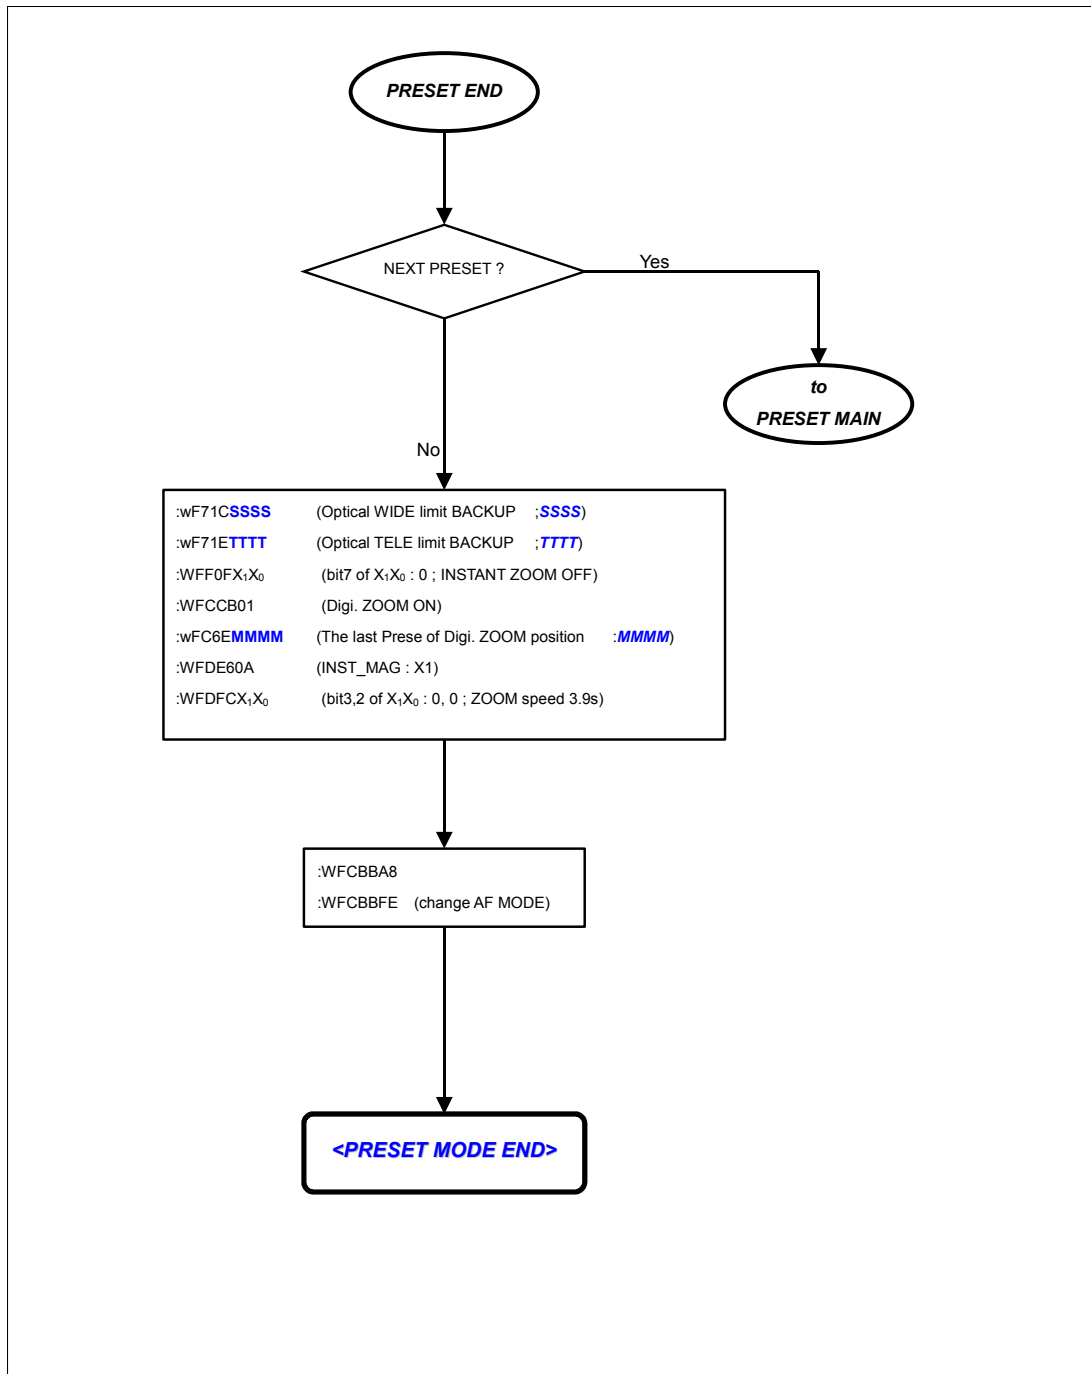

• APPENDIX

REV. No.	DATE	Firmware Version				Contents
		VK-S274R	VK-S274ER	VK-K274R	VK-K274ER	
1.0	2003/01/22	Ver. 1.02	<i>Not Complete</i>	<i>Not Complete</i>	<i>Not Complete</i>	New Release
1.1	2003/04/21	Ver. 1.02	Ver. 1.02	Ver. 1.02	Ver. 1.02	<Addition Model> VK-S274ER, VK-K274R, VK-K274ER