

SPOT CANCEL *FOR* *VK-S274 SERIES*

[REV. 1.5]

This manual applies to the following models:

<NTSC>	VK-S274
<PAL>	VK-S274E
<EIA>	VK-K274
<CCIR>	VK-K274E

CONTENTS

• S274 SPOT CANCEL	3
1. White Spot compensation:	4
a) Specification	4
b) Command:	4
i) White Spot Detection & Start Compensation:	4
ii) Detection condition: (DSS ON/OFF)	4
iii) DSS Shutter Speed setting (Effective only with DSS ON)	5
iv) Threshold Level setting:	5
v) Location data check:	5
vi) Location check:	6
vii) Write the detected white-spot data into the EEPROM:	6
c) FLOW CHART	7
i) Spot Detection:	7
ii) Spot data readout:	8
iii) Spot data check:	8
iv) Write-in the spot location data:	9
• APPENDIX	10

- **S274 SPOT CANCEL**

1. White Spot compensation:

a) Specification

The white-spot will be searched/detected and compensated automatically every time after the power on then these detected white-spots address data can be written to EEPROM for priority compensation. Refer to Fig.1 for the detection spec.

Fig.1 White Spot Detection Function Spec

No. of compensation		10 Max. [*1]
Write to EEPROM		5 Max.
Detection Function	AGC	MAX.(Use with AGC MAX setting)
	DSS	OFF / ON Selectable Selectable Shutter speed during DSS ON
	Threshold	Set by EEPROM

[Note]

*1: 10 spots including 5 spots for EEPROM writing.

For example: If 5 spots data have been written to EEPROM, the Max. compensation capacity during power on will be 5 spots.

b) Command:

i) White Spot Detection & Start Compensation:

Automatically detects White Spots every time power turns on Therefore, the RAM Initialization (Com_274_v14.doc) or Power Reset is required for new detection.

<Reference> RAM Initialize command
 address = FCAC
 :WFCAC00

ii) Detection condition: (DSS ON/OFF)

address = 10A0
:W10A0X₁X₀ ; X₁X₀ = H'91 (default)
 bit 7 of X₁X₀
 ; 1 : Detect during DSS ON (default)
 ; 0 : Detect during DSS OFF

[Note]

Detection during DSS ON: Takes longer time for picture appearance.
(The picture appearance time will vary according to the DSS shutter speed setting, threshold level and total number of white spots in the screen.)

iii) DSS Shutter Speed setting (Effective only with DSS ON)

```

address = 109C
:r109C00
:w109CX1X0 ; X1X0 = H'20 (default)
; <Data range>
; H'02(min) -- H'20 (max)
; <DSS speed>
; [NTSC]
; DSS speed = 1 / 60 * X1X0
; default ; H'20 ; 1/2 (s)
; [PAL]
; DSS speed = 1 / 50 * X1X0
; default ; H'20 ; 1/1.5 (s)

```

[Note]

The noise on the screen might be mistaken detected as white-spots when if DSS Shutter speed changed from default setting so the threshold level should be adjusted appropriately.

iv) Threshold Level setting:

```

address = 109E
:r109E0000
:w109EX3X2X1X0 ; X3X2X1X0 = H'01E0 (default)
; max. H'03FF

```

[Note]

The noise on the screen might be mistaken detected as white-spots or will not be detected actual white-spot at all when if the threshold level is not set appropriately.

v) Location data check:

Read 10 byte continuously to check the detected spot location data.

The read out data for "PPPP", "QQQQ", "SSSS", "TTTT", "UUUU", "VVVV", "WWWW", "XXX X", "YYYY", "ZZZZ" of the following command will be the white-spot location data.

[Note]

Read out data H'0000: No white-spot is existed = No location data.
Duplicated location data may be displayed.

```

[ V SPOT 1 ] address = FF14
:rFF14PPPPQQQQSSSSTTTTUUUU

[ V SPOT 2 ] address = FF16
:rFF16VVVVWWWWXXXXYYYYZZZZ

[ H SPOT 1 ] address = FF18
:rFF18PPPPQQQQSSSSTTTTUUUU


[ H SPOT 2 ] address = FF1A
:rFF1AVVVVWWWWXXXXYYYYZZZZ

```


H' X_{3-N}X_{2-N}X_{1-N}X_{0-N} · V direction location data (order No.)

c) FLOW CHART


i) Spot Detection:

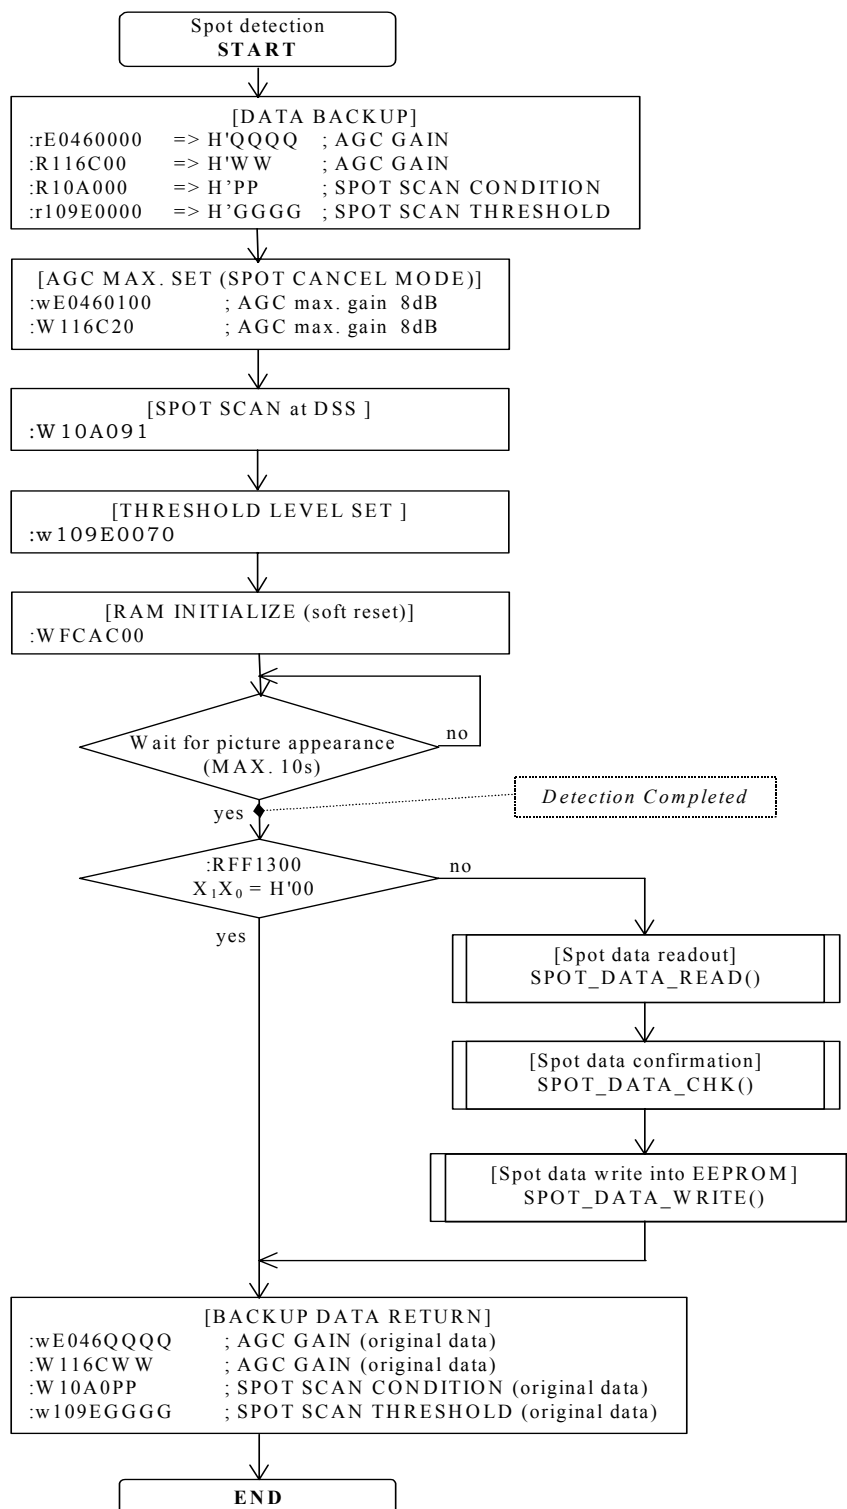


ii) Spot data readout:

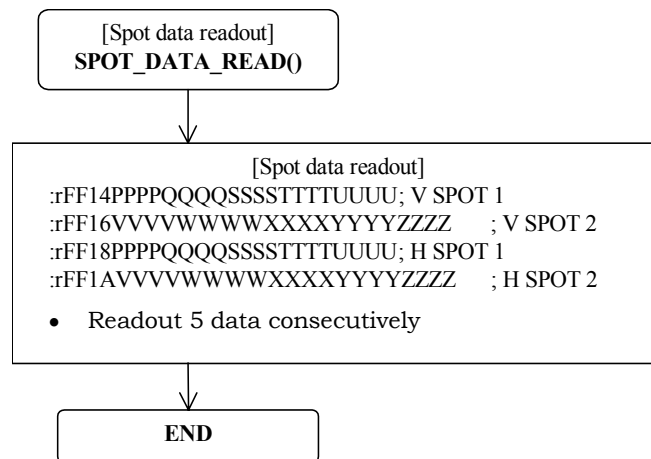

iii) Spot data check:

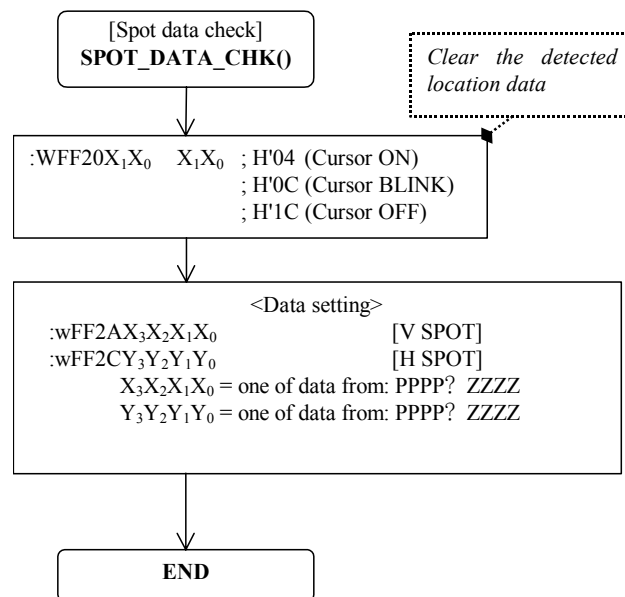

iv) Write-in the spot location data:

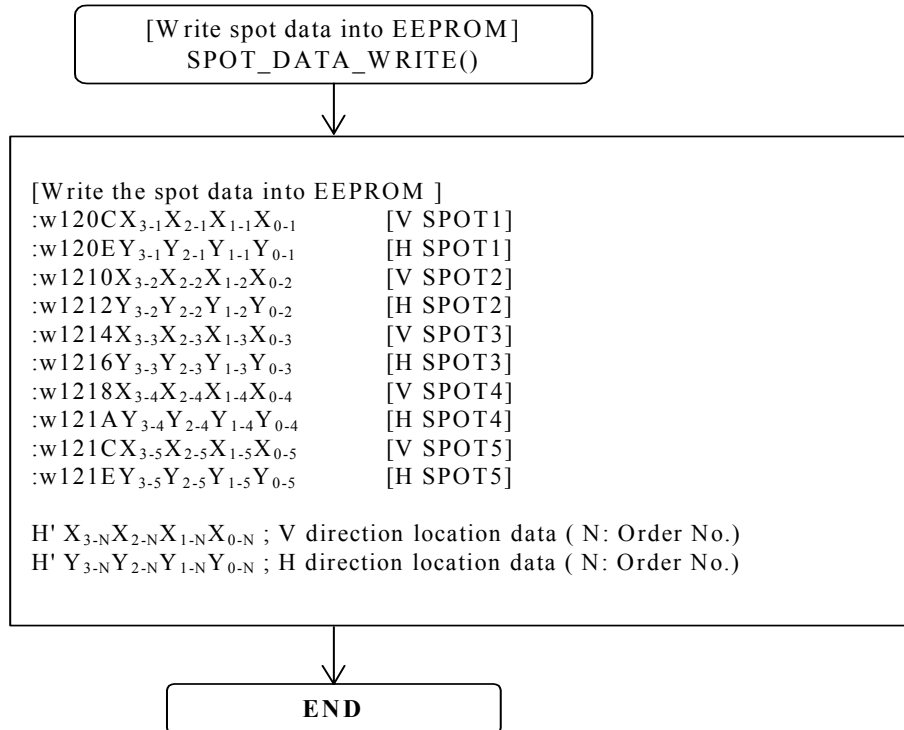

• APPENDIX

[REV. 1.0]

2001/08/31* New Version release (VK-S274, VK-S274E)

[REV. 1.1]

2001/11/06* Mass-production Version [VK-K274]
* Mass-production Version [VK-K274E]

[REV. 1.2]

2002/01/23* Page.5 <revision> DSS Shutter Speed setting
* [true] “:W109CX₁X₀” [mistake] “:W10A0X₁X₀”
* Page.7 <revision> Spot detection flow chart

[REV. 1.3]

2002/02/01* Page.7 <revision> Spot detection flow chart

[REV. 1.4]

2002/02/05* Page.9 <revision> Write spot location data flow chart

[REV. 1.5]

2002/02/27* Page.7 <revision> Spot detection flow chart
* SPOT SCAN THRESHOLD Data [\$109E] Backup
* [true] “:RFF13X₁X₀” [mistake] “:RFF2EX₁X₀”